

**APPLICATIONS** - Designed to provide protection from oil, dirt, and dust. Universal holes accommodate many types of pilot lights, switches and pushbuttons.

**CONSTRUCTION** - Fabricated from 14 gauge carbon steel or type 304 stainless steel with continuously welded seams. Enclosures feature:

- Cover secured with captivated screws
- Oil resistant gasket applied to the cover
- External mounting feet for wall or machinery mounting
- Universal pushbutton holes (30.5mm)
- 22mm available with -m addition to part number

**FINISH** - Standard RAL 7035 texture polyester powder coat finish on interior and exterior of enclosures. Recoatable, smooth, white or ANSI-61 gray available

at no charge. Standard RAL and custom match finishes available for an additional charge, please contact Schaefer's Electrical Enclosures, Inc. for further assistance. All powder coat finishes applied over cleaned phosphatized surfaces. Stainless Steel enclosures have a polished #4 finish.

**OPTIONS** - Schaefer's Electrical Enclosures, Inc. can modify standard enclosures or custom design enclosures according to your specifications. Custom sizes, materials, and many more options are available. Quotations upon request.

**INDUSTRY STANDARDS**

- UL 50 Listed
- CUL 50 Listed
- Type 4, 4X, 12

Carbon Steel 30.5mm hole	Catalog Number		304 Stainless Steel 22.5mm hole	Holes	Enclosure Size H x W x D (inches)	Shpg. Wt.	Hole Location	
	304 Stainless Steel 30.5mm hole	Carbon Steel 22.5 mm hole					J	K
SPPB-1	SPPBSS-1	SPPB-1-M	SPPBSS-1-M	1	3.5 x 3.25 x 2.75	2	1.918	1.793
SPPB-2	SPPBSS-2	SPPB-2-M	SPPBSS-2-M	2	5.75 x 3.25 x 2.75	3	1.918	1.793
SPPB-3	SPPBSS-3	SPPB-3-M	SPPBSS-3-M	3	8 x 3.25 x 2.75	3	1.918	1.793
SPPB-4	SPPBSS-4	SPPB-4-M	SPPBSS-4-M	4	10.25 x 3.25 x 2.75	4	1.918	1.793
SPPB-4S	SPPBSS-4S	SPPB-4S-M	SPPBSS-4S-M	4	7.25 x 6.25 x 3	5	2.668	2.168
SPPB-5	SPPBSS-5	SPPB-5-M	SPPBSS-5-M	5	12.5 x 3.25 x 2.75	5	1.918	1.793
SPPB-6	SPPBSS-6	SPPB-6-M	SPPBSS-6-M	6	9.5 x 6.25 x 3	6	2.668	2.168
SPPB-6VL	SPPBSS-6VL	SPPB-6VL-M	SPPBSS-6VL-M	6	14.75 x 3.25 x 2.75	6	1.918	1.793
SPPB-7*	SPPBSS-7	SPPB-7-M	SPPBSS-7-M	7	18 x 3.25 x 2.75	6	2.418	1.793
SPPB-8	SPPBSS-8	SPPB-8-M	SPPBSS-8-M	8	20.25 x 3.25 x 2.75	8	2.418	1.793
SPPB-9	SPPBSS-9	SPPB-9-M	SPPBSS-9-M	9	9.5 x 8.5 x 3	8	2.668	2.168
SPPB-9VL	SPPBSS-9VL	SPPB-9VL-M	SPPBSS-9VL-M	9	22.5 x 3.25 x 2.75	8	2.418	1.793
SPPB-10	SPPBSS-10	SPPB-10-M	SPPBSS-10-M	10	24.75 x 3.25 x 2.75	8	2.418	1.793
SPPB-12	SPPBSS-12	SPPB-12-M	SPPBSS-12-M	12	11.75 x 8.5 x 3	9	2.668	2.168
SPPB-16	SPPBSS-16	SPPB-16-M	SPPBSS-16-M	16	11.75 x 10.75 x 3	11	2.668	2.168
SPPB-20	SPPBSS-20	SPPB-20-M	SPPBSS-20-M	20	14 x 10.75 x 3	12	2.668	2.168
SPPB-25	SPPBSS-25	SPPB-25-M	SPPBSS-25-M	25	14 x 13 x 3	14	2.668	2.168



\* Cannot be type 4 or 12 UL labeled due to screw well spacing on lids

# Pushbutton Enclosures

## Type 12 Standard Oil-Tight Pushbutton Enclosure



SPPB • SPPBSS • SPPB-M

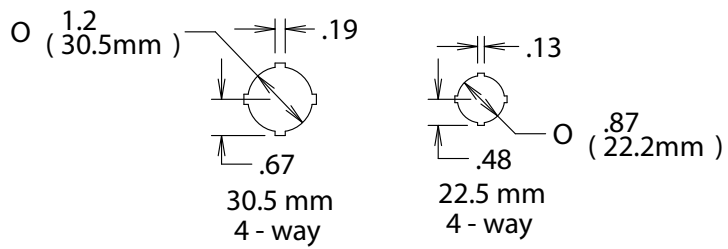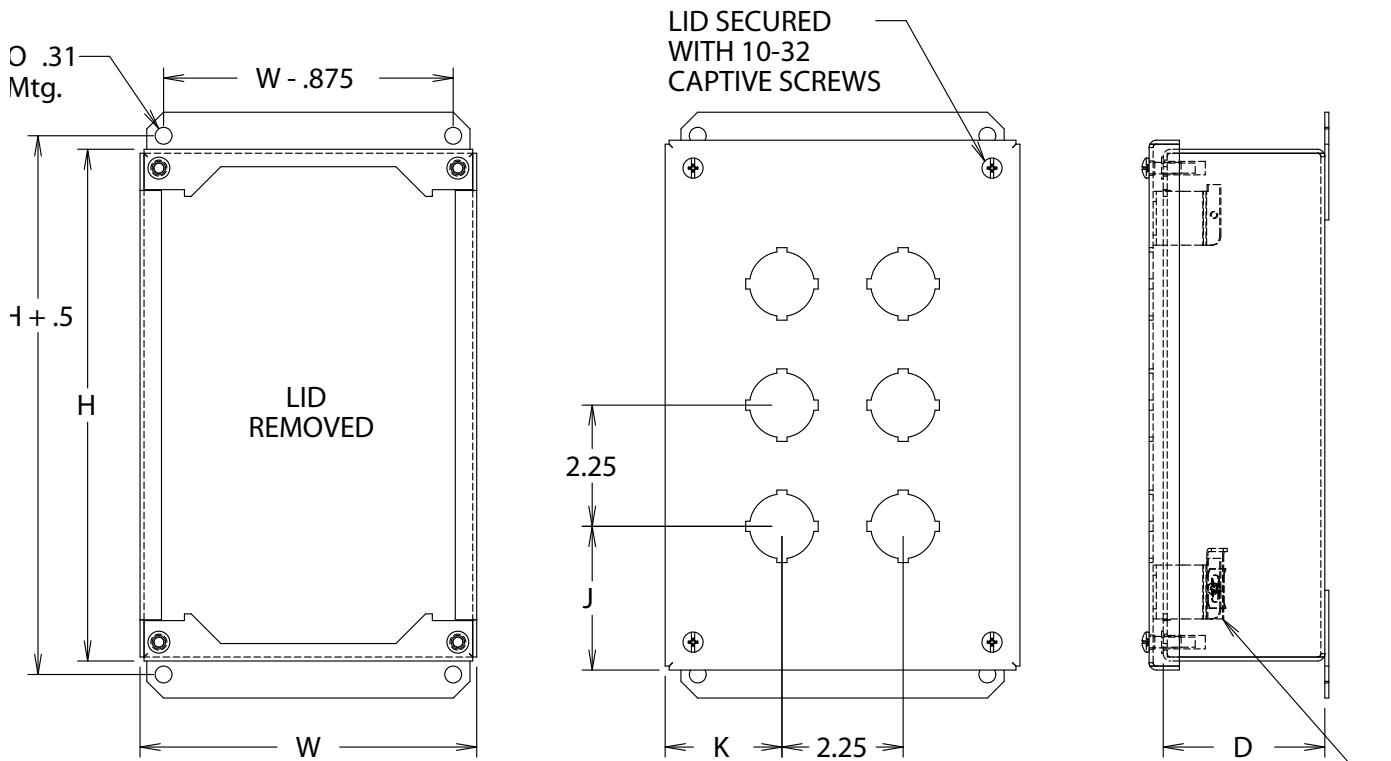

INTERNAL LIFT-OFF HINGES ON UNITS WITH MORE THAN ONE COLUMN OF PUSHBUTTONS

