

Floor Mount Enclosures

Type 4 Double Door



APPLICATION - Designed to house electrical controls, and instruments in a variety of environments, including wet environments.

CONSTRUCTION - Fabricated from 10 and 12 gauge carbon steel, type 304 or 12 gauge type 316 stainless steel with continuously welded seams. Enclosure features:

- Doors are secured with continuous hinges with removable hinge pins, and clamps and screws
- Padlocking hasp and staple
- Adhesive backed, oil resistant gasket applied to the doors
- 12-inch floor stands
- Print pocket
- Heavy-duty eyes
- Ground studs inside cabinet and door
- Collar studs provided for mounting optional sub panels.
- Removable center post for easy installation of the sub-panel
- Body stiffeners for extra rigidity

FINISH - Standard RAL 7035 texture polyester powder coat finish on interior and exterior of enclosures. Recoatable, smooth, white or ANSI-61 gray available at no charge. Standard RAL and custom match finishes available for an additional charge, please contact Schaefer's Electrical Enclosures, Inc. for further assistance. All powder coat finishes applied over cleaned phosphatized surfaces. Carbon steel sub panels have a white polyester powder coat finish. Stainless Steel enclosures have a polished #4 finish.

OPTIONS - Schaefer's Electrical Enclosures, Inc. can modify standard enclosures or custom design enclosures according to your specifications. Holes, cutouts, sizes, materials, and many more options are available. Quotations upon request.




INDUSTRY STANDARDS

- UL 50 Listed
- CUL 50 Listed
- Type 4 & 4X

Carbon Steel #	Catalog Number		Enclosure Size H x W x D (inches)	Shpg. Wt.	Sub Panel Part Number	Sub Panel Size (H x L)
	304 Stainless Steel #	316 Stainless Steel #				
SPN4D-62488	SPN4DSS-62488	SPN4DSS6-62488	62 x 48 x 8	340	SPDD-6048	56 x 44
SPN4D-624810	SPN4DSS-624810	SPN4DSS6-624810	62 x 48 x 10	357	SPDD-6048	56 x 44
SPN4D-626010	SPN4DSS-626010	SPN4DSS6-626010	62 x 60 x 10	433	SPDD-6060	56 x 56
SPN4D-746010	SPN4DSS-746010	SPN4DSS6-746010	74 x 60 x 10	518	SPDD-7260	68 x 56
SPN4D-747210	SPN4DSS-747210	SPN4DSS6-747210	74 x 72 x 10	626	SPDD-7272	68 x 68
SPN4D-624812	SPN4DSS-624812	SPN4DSS6-624812	62 x 48 x 12	385	SPDD-6048	56 x 44
SPN4D-626012	SPN4DSS-626012	SPN4DSS6-626012	62 x 60 x 12	507	SPDD-6060	56 x 56
SPN4D-746012	SPN4DSS-746012	SPN4DSS6-746012	74 x 60 x 12	542	SPDD-7260	68 x 56
SPN4D-747212	SPN4DSS-747212	SPN4DSS6-747212	74 x 72 x 12	626	SPDD-7272	68 x 68
SPN4D-624816	SPN4DSS-624816	SPN4DSS6-624816	62 x 48 x 16	424	SPDD-6048	56 x 44
SPN4D-626016	SPN4DSS-626016	SPN4DSS6-626016	62 x 60 x 16	508	SPDD-6060	56 x 56
SPN4D-746016	SPN4DSS-746016	SPN4DSS6-746016	74 x 60 x 16	560	SPDD-7260	68 x 56
SPN4D-747216	SPN4DSS-747216	SPN4DSS6-747216	74 x 72 x 16	687	SPDD-7272	68 x 68
SPN4D-624820	SPN4DSS-624820	SPN4DSS6-624820	62 x 48 x 20	464	SPDD-6048	56 x 44
SPN4D-626020	SPN4DSS-626020	SPN4DSS6-626020	62 x 60 x 20	552	SPDD-6060	56 x 56
SPN4D-746020	SPN4DSS-746020	SPN4DSS6-746020	74 x 60 x 20	638	SPDD-7260	68 x 56
SPN4D-747220	SPN4DSS-747220	SPN4DSS6-747220	74 x 72 x 20	739	SPDD-7272	68 x 68
SPN4D-624824	SPN4DSS-624824	SPN4DSS6-624824	62 x 48 x 24	503	SPDD-6048	56 x 44
SPN4D-626024	SPN4DSS-626024	SPN4DSS6-626024	62 x 60 x 24	596	SPDD-6060	56 x 56
SPN4D-746024	SPN4DSS-746024	SPN4DSS6-746024	74 x 60 x 24	686	SPDD-7260	68 x 56
SPN4D-747224	SPN4DSS-747224	SPN4DSS6-747224	74 x 72 x 24	805	SPDD-7272	68 x 68



NOTE: Sub panels must be ordered separately. Reference page 124 for sub panel layout

SPN4D • SPN4DSS • SPN4DSS6

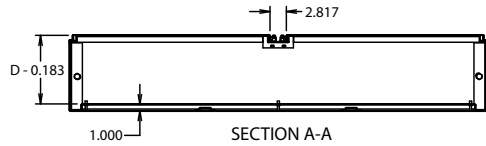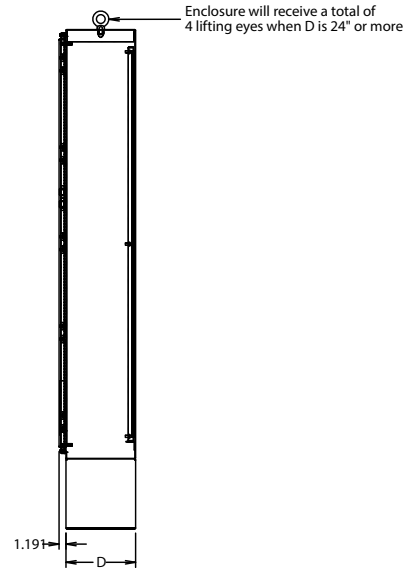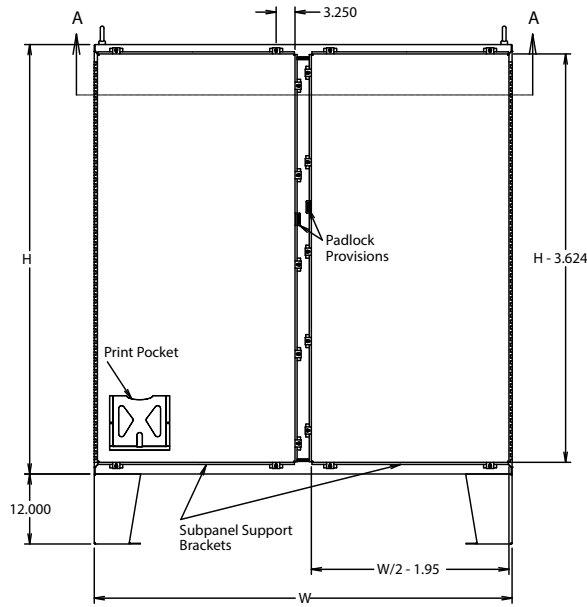

NOTES:

1. Maximum between door clamps is 16.84" (center to center).
2. If ordered with a handle, $H = H - 2$

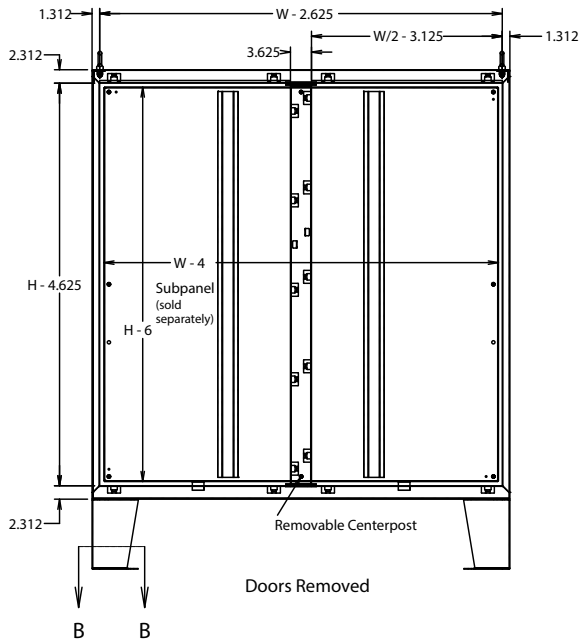

SECTION B-B