




APPLICATIONS

- Patented "Click & Fit" design provides a hardware free installation!
- Poured-in foam gasket allows for quick NEMA 12 sealing against the enclosure
- Plastic made from strong (ABS-FR), self-extinguishing (UL 94 VO) material
- Black and Light Gray (RAL 7035) grills available

INDUSTRY STANDARDS

- TYPE 12
- CE, UR and cUR

Technical data:	PFA 10000	PFA 20000	PFA 30000	PFA 40000	PFA 60000
Filtration efficiency	88%	91%	91%	91%	91%
Outside Dimension (mm)	109x109x26	145x145x26	202x202x34	252x252x38	320x320x39
Construction Material	sprayed thermoplastic (ABS-FR), self-extinguishing UL 94 VO				
Weight	.06 kg	.12 kg	.26 kg	.46 kg	.7 kg

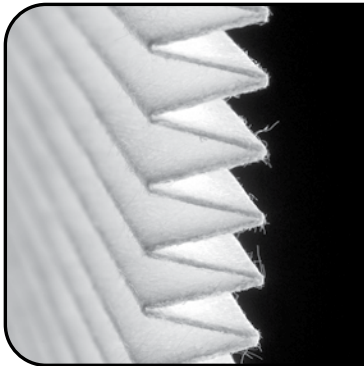

APPLICATIONS

- Special patent pending fluted filter design increases the time between maintenance by 3X.
- Allows for greater CFM in dirty environments
- Sold in packs of 5.

Part Number	Use with 4th Gen FF
PFF 10000	PF/PFA 1XXXX
PFF 20000	PF/PFA 2XXXX
PFF 30000	PF/PFA 3XXXX
PFF 40000	PF/PFA 4XXXX
PFF 60000	PF/PFA 6XXXX